

## TEAC<sup>®</sup>

## PROFESSIONAL CD PLAYER



**PROFESSIONAL  
CD PLAYER**  
Pitch Control  
Shuffle Play  
Music Calendar  
 Rack Mountable

**Rack Mounting  
Rack Kit PRM1440**

### General Information

- ❑ Professional Grade CD Player with Remote Control
- ❑ 32 Track Selection Random Memory Programming
- ❑ 16-bit Digital/Analog Converter
- ❑ Auto-Cue with LED Indicator
- ❑ Intro Check Play with Track Calendar Display
- ❑ Multi-Repeat Functions:
  - Single Track Repeat
  - All Tracks Repeat
  - Programmed Tracks Repeat
  - Shuffle Play
  - A/B Repeat
  - Continuous Shuffle Repeat
- ❑ Variable Speed with Pitch Control  $\pm 6\%$
- ❑ Quick Track Search
- ❑ Headphone Jack with Level Control
- ❑ High Luminosity Digital Fluorescent Display
- ❑ Time Display (Total/Elapsed/Remaining)
- ❑ Rack Mounting with Optional U Rack Mounting Kit PRM1440

**PITCH CONTROL**

- ❑ Auto-Cue Direct Disc Access
- ❑ Professional Audio Applications
- ❑ Intro-Check Search Function

### Specifications

Channels:	2 Channel Stereo
Frequency Response:	20 - 20,000 Hz $\pm 1.5$ db
Signal to Noise Ratio:	85 db (1 KHz)
Dynamic Range:	90 db
Wow and Flutter:	Unmeasurable
T. H. D.:	<0.02% at 1 KHz
Channel Separation:	> than 80 db
Laser Pickup:	Laser High Resolution
Digital Filter:	16 bits Linear
Converters:	Linear 16 bit Dual Digital/Analog
Random Programming:	
Pitch Control:	32 Selection Random Memory
Repeat Functions:	Variable $\pm 6\%$ Single Track Repeat, Single Disc Repeat, Programmed Tracks Repeat, Shuffle Play, Shuffle Repeat
Output Level:	1.0 Volt RMS
Headphones Output:	1 mWatt at 8 ohm
Headphones Control:	Output Level Control
Power Requirement:	120 V 60 Hz
Power Consumption:	12 Watts
Dimensions:	17 1/8" W., 4" H., 11.5" D 435 x 104 x 290 mm
Finish:	Matte Black
Net Weight:	8 Lb (3.7 Kg)
Terminations:	RCA Standard Jacks

#### Optional Rack

**Mounting:** Paso Model PRM1440 Rack Kit (2U)


# PCDP1440

**PCDP1440**

**REV 1.0**


**Form NT 236**

*Engineering leadership in sound products since 1931*

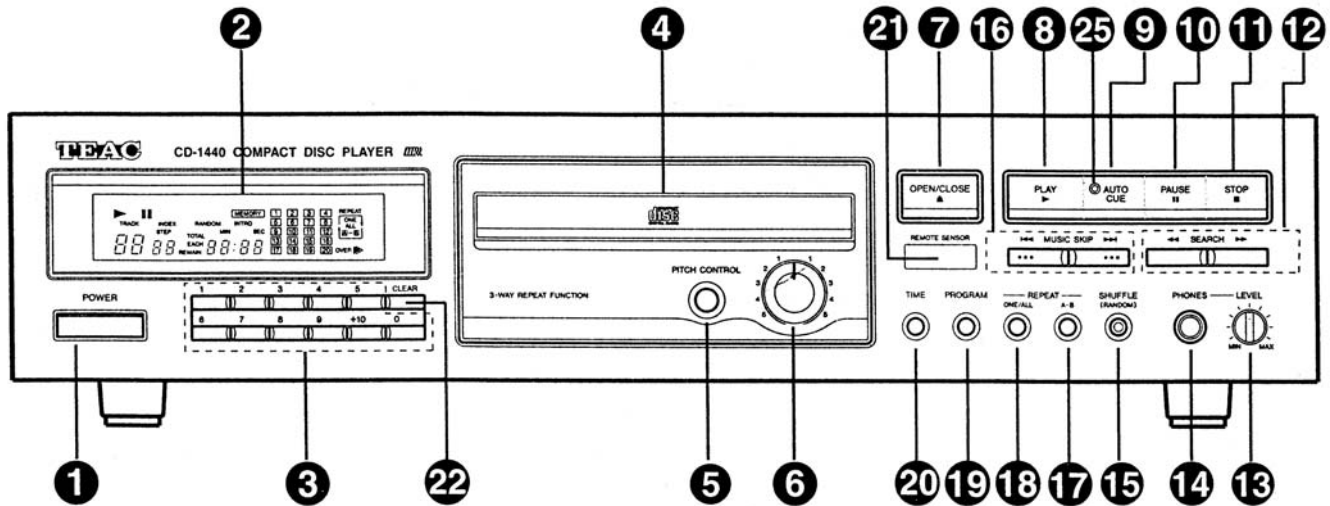



Front Panel Controls

- 1 POWER Switch
- 2 Multi-function display window
  - A ▶ (play) indicator
  - B || (pause) indicator
  - C INDEX indicator
  - D RANDOM indicator
  - E INTRO Check indicator
  - F MEMORY indicator
  - G Music calendar display
  - H REPEAT (ONE, ALL, A-B) indicator
  - I OVER indicator
  - J TIME (MIN, SEC) indicator
  - K TOTAL indicator
  - L EACH indicator
  - M REMAIN indicator
  - N STEP indicator
  - O TRACK indicator
- 3 10 Key button (0, - +10)
- 4 Disc tray
- 5 PITCH CONTROL on/off button
- 6 PITCH CONTROL knob
- 7 OPEN/CLOSE button (▲)
- 8 PLAY button (▶)
- 9 AUTO CUE button
- 10 PAUSE button (||)
- 11 STOP button (■)
- 12 SEARCH button (◀▶)
- 13 PHONES LEVEL control knob
- 14 PHONES jack
- 15 SHUFFLE button
- 16 MUSIC SKIP buttons (◀▶)
- 17 REPEAT A-B button
- 18 REPEAT ONE/ALL button
- 19 PROGRAM button
- 20 TIME button
- 21 REMOTE SENSOR
- 22 CLEAR button
- 23 CHECK button
- 24 INTRO Check button
- 25 AUTO CUE indicator

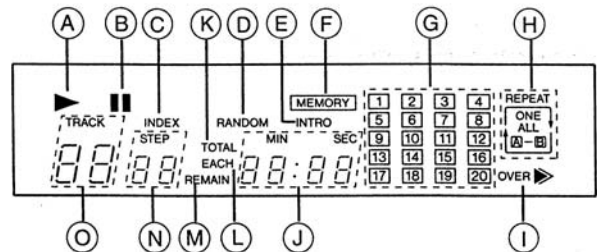

Digital Display

Rear Panel View

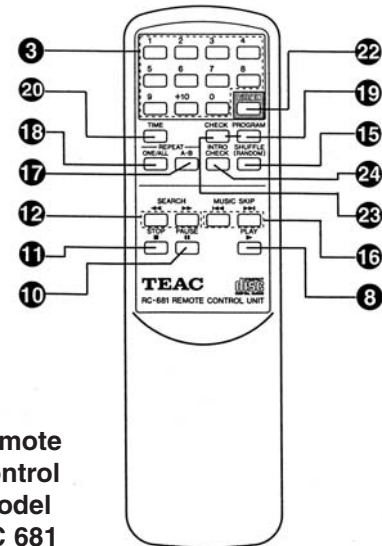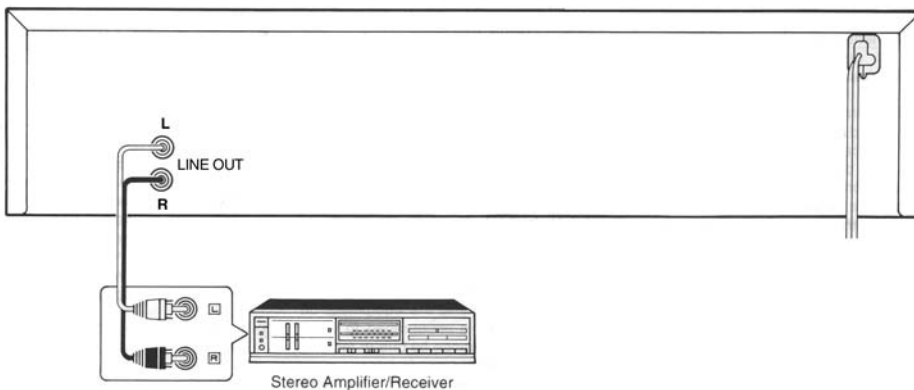

Remote Control Model RC 681

AUTHORIZED DISTRIBUTOR

**PASO**<sup>®</sup>  
 PROFESSIONAL AUDIO & SOUND  
**PASO SOUND PRODUCTS, INC.**  
 4750F GOER DRIVE  
 CHARLESTON, SOUTH CAROLINA 29406-6511 USA  
 Phone: 843 308 9005 - Fax: 843 308 0904  
 EMAIL: info@pasosound.com - URL: www.pasosound.com  
 FORM NT 236 RV 1.0 Printed in USA